



Special Car Lithium Battery



Production line robot battery

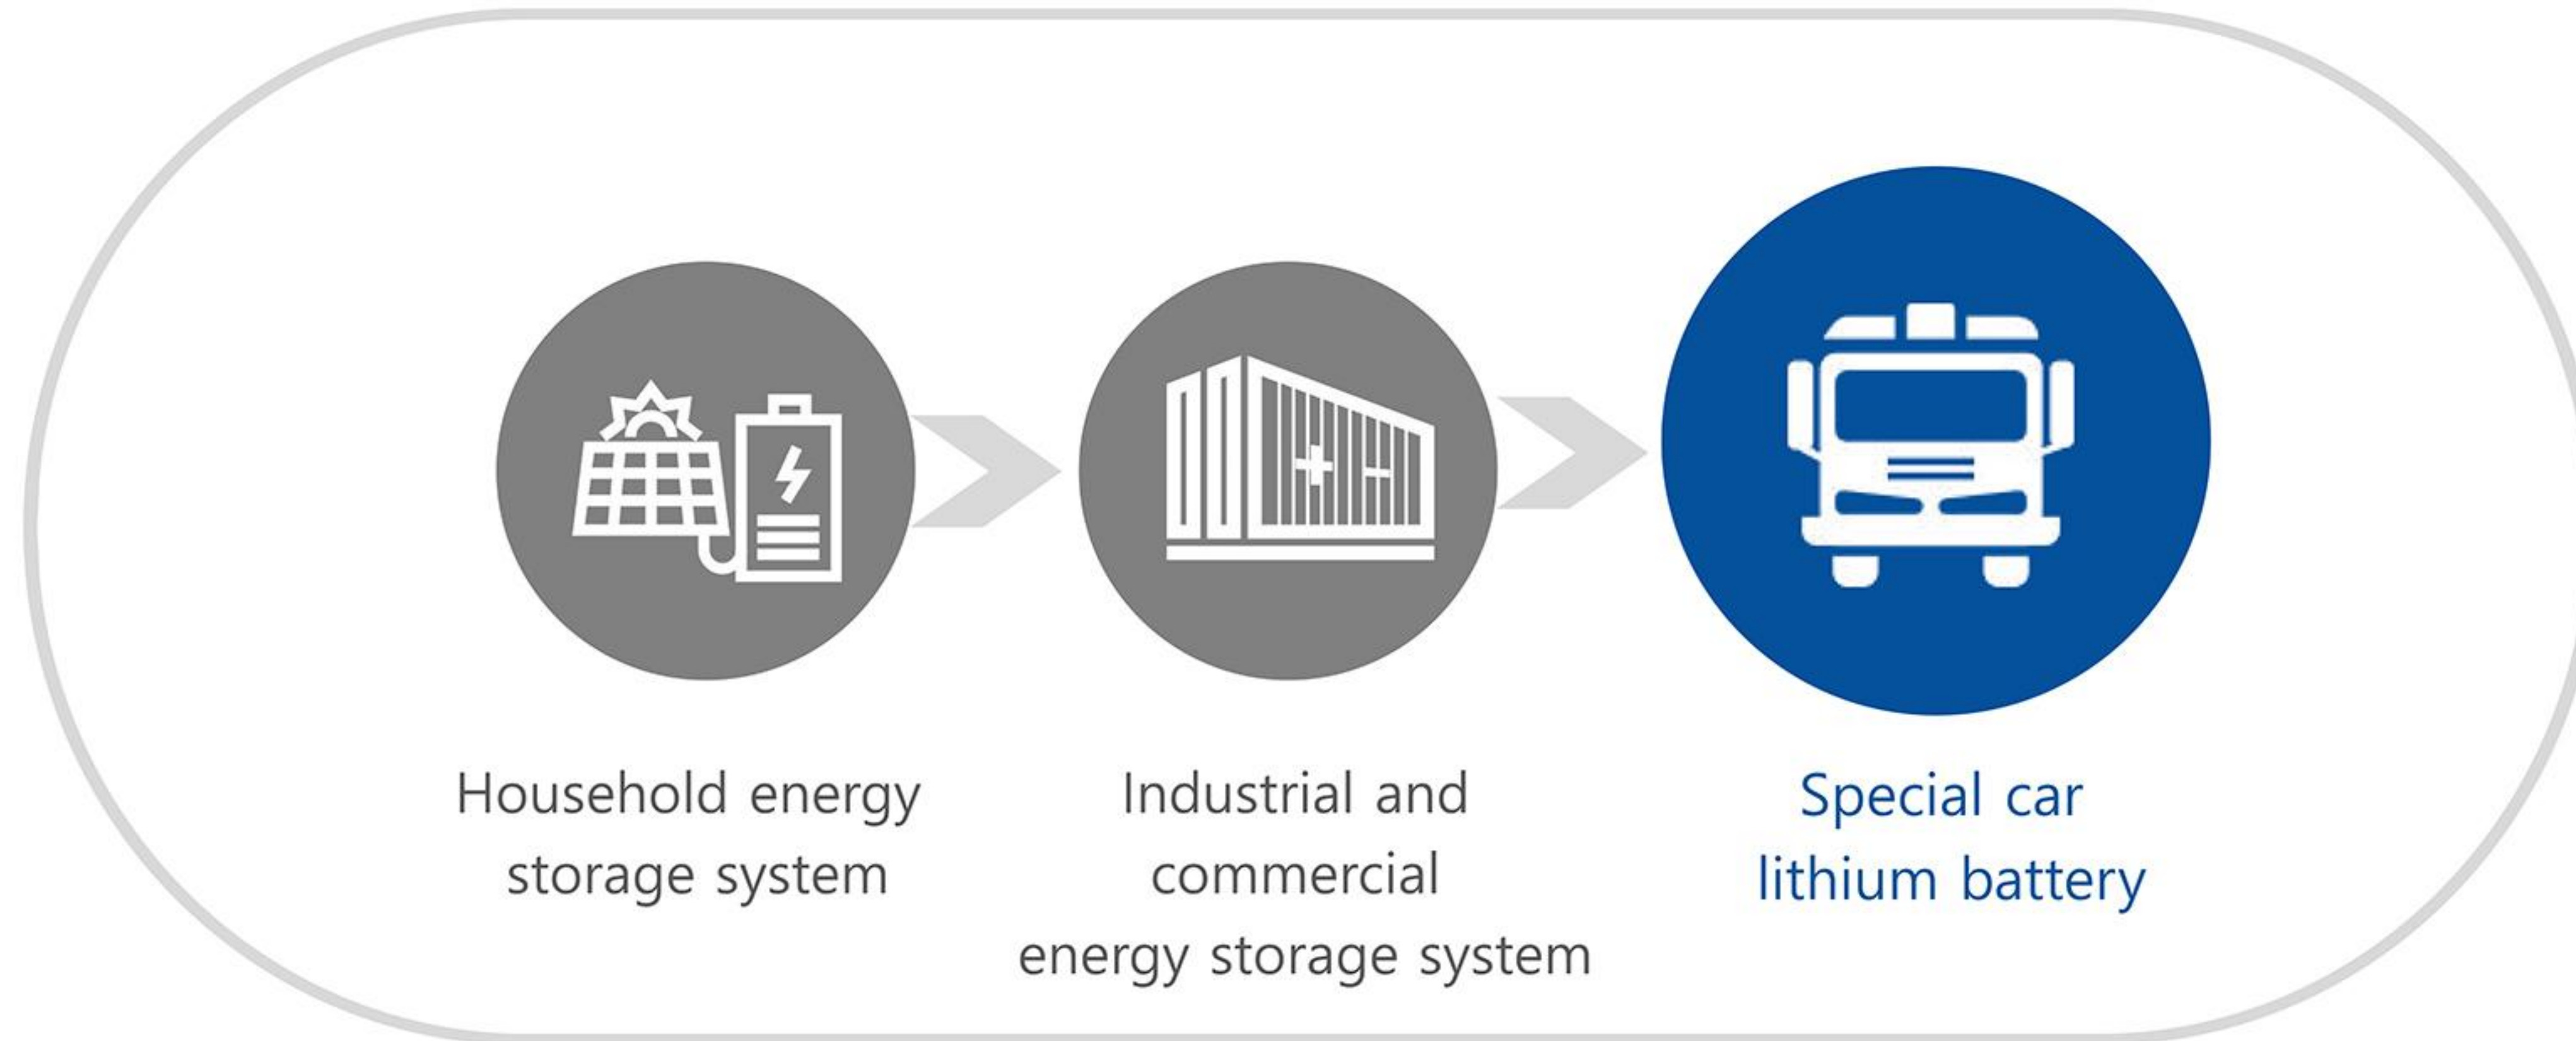

Multi-battery parallel technology

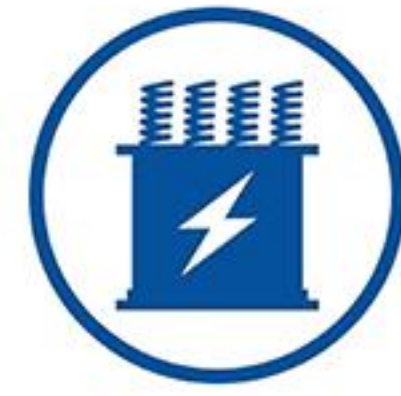

High voltage & current technology



BMS multi-level management



Fast charging technology

Model	24V60Ah	48V30Ah
Nominal Voltage	24V	48V
Rated Capacity	60Ah	30Ah
End-of-Charge Voltage	29.2V	54.75V
End-of-Discharge Voltage	20.0V	40.5V
Max. Charge Current	20A	10A
Max. Discharge Current	60A	30A
Communication	RS485/CAN	RS485/CAN
Size (mm)	345*205*155mm	330*240*160mm
Weight (kg)	19.5kg(about)	19.5kg(about)



Golf cart battery



High rate & high current discharge



Long cycle life



BMS self-developed



15 levels protection

Model	51.2V100Ah	64V100Ah	76.8V100Ah
Nominal Voltage	48V	64V	76.8V
Rated Capacity	100Ah	100Ah	100Ah
End-of-Charge Voltage	58.0V	54.0V	65.0V
End-of-Discharge Voltage	42.0V	72.0V	86.0V
Max. Charge Current	50A	50A	50A
Max. Discharge Current	100A	100A	100A
Communication	RS485	RS485	RS485
Size (mm)	475*315*200mm	/	/
Weight (kg)	50kg (about)	/	/



Forklift LiFePO4 battery



High security



High voltage & current technology



Support Touch screen display



Fast charging technology

Model	80V300Ah	96V300Ah	96V400Ah
Nominal Voltage	80V	96V	96V
Rated Capacity	300Ah	300Ah	400Ah
End-of-Charge Voltage	91.2V	109.5V	109.5V
End-of-Discharge Voltage	42.0V	78.0V	78.0V
Max. Charge Current	100A	100A	100A
Max. Discharge Current	200A	200A	200A
Communication	RS485/CAN	RS485/CAN	RS485/CAN
Size (mm)	/	/	/
Weight (kg)	/	/	/



Marine battery



High reliability & high security



IP65 waterproof



Support Low temperature self-heating



High rate & high current discharge

Model	24V200Ah	48V100Ah	96V100Ah
Nominal Voltage	24V	48V	96V
Rated Capacity	200Ah	100Ah	100Ah
End-of-Charge Voltage	29.2V	54.75V	109.5V
End-of-Discharge voltage	21.6V	40.0V	80.0V
Max. Charge Current	100A	100A	100A
Max. Discharge Current	150A	200A	200A
Communication	RS485/CAN	RS485/CAN	RS485/CAN
Size (mm)	/	/	/
Weight (kg)	/	/	/



Bicycle airplane battery



High rate discharge



IP65 waterproof



Model design



High safety

Model	512V20Ah	614V20Ah
Nominal Voltage	5(Machine)+1主(Main)	6(Machine)+1主(Main)
Rated Capacity	512V	614V
End-of-Charge Voltage	20Ah	20Ah
End-of-Discharge voltage	576V	700V
Max. Charge Current	448V	518V
Max. Discharge Current	10A	10A
Communication	200A	200A
Size (mm)	CAN	CAN
Weight (kg)	/	/



东莞市钧赫电子科技有限公司
Dongguan Junhe Electronic Technology Co., Ltd

Based on long-term business and customer focus
Continue to create competitive products